

TRC-190 Series

19-inch rackmount chassis media converter



Features and Benefits

- 19-inch chassis for rackmount use
- 19 slots for high-density applications
- Supports dual power inputs with redundancy
- Fanless chassis design reduces servicing costs

Certifications



Introduction

The TRC-190 rackmount chassis provides 19 slots for media converter modules from the CSM-200 Series of Ethernet-to-fiber modules and TCF-142-RM Series of serial-to-fiber modules. A TRC-190 chassis comes with one AC or DC power input, with an optional redundant power expansion AC or DC module available to enhance reliability. The PWR-190-AC and PWR-190-DC-48 power modules can be installed at the same time.

Specifications

Power Parameters

Input Voltage	TRC-190-AC: 110 to 240 VAC TRC-190-DC-48: 48 VDC Redundant dual inputs, Redundant dual inputs
No. of Power Inputs	2
Overload Current Protection	Supported
Power Consumption	TRC-190-AC: 1.5 A @ 100 to 240 VAC TRC-190-DC-48: 3.2 A @ 36 to 53 VDC

Physical Characteristics

Dimensions	440 x 260 x 88 mm (17.32 x 10.24 x 3.46 in)
Installation	19-inch rack mounting
IP Rating	IP30
Weight	5200 g (11.4 lb)

Environmental Limits

Ambient Relative Humidity	5 to 95% (non-condensing)
Operating Temperature	0 to 60°C (32 to 140°F)
Storage Temperature (package included)	-20 to 75°C (-4 to 167°F)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV(AC), 1 kV(DC) IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF
Environmental Testing	IEC 60068-2-1 IEC 60068-2-2 IEC 60068-2-3
Safety	IEC 62368-1, UL 62368-1
Vibration	IEC 60068-2-6

MTBF

Time	1,055,112 hrs
Standards	Telcordia (Bellcore), GB

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x TRC-190 Series converter
Bracket	18 x faceplate and screws
Power Supply	1 x power cord
Documentation	1 x quick installation guide 1 x warranty card
Note	This product requires additional modules (sold separately) to function.

Dimensions

Unit: mm (inch)

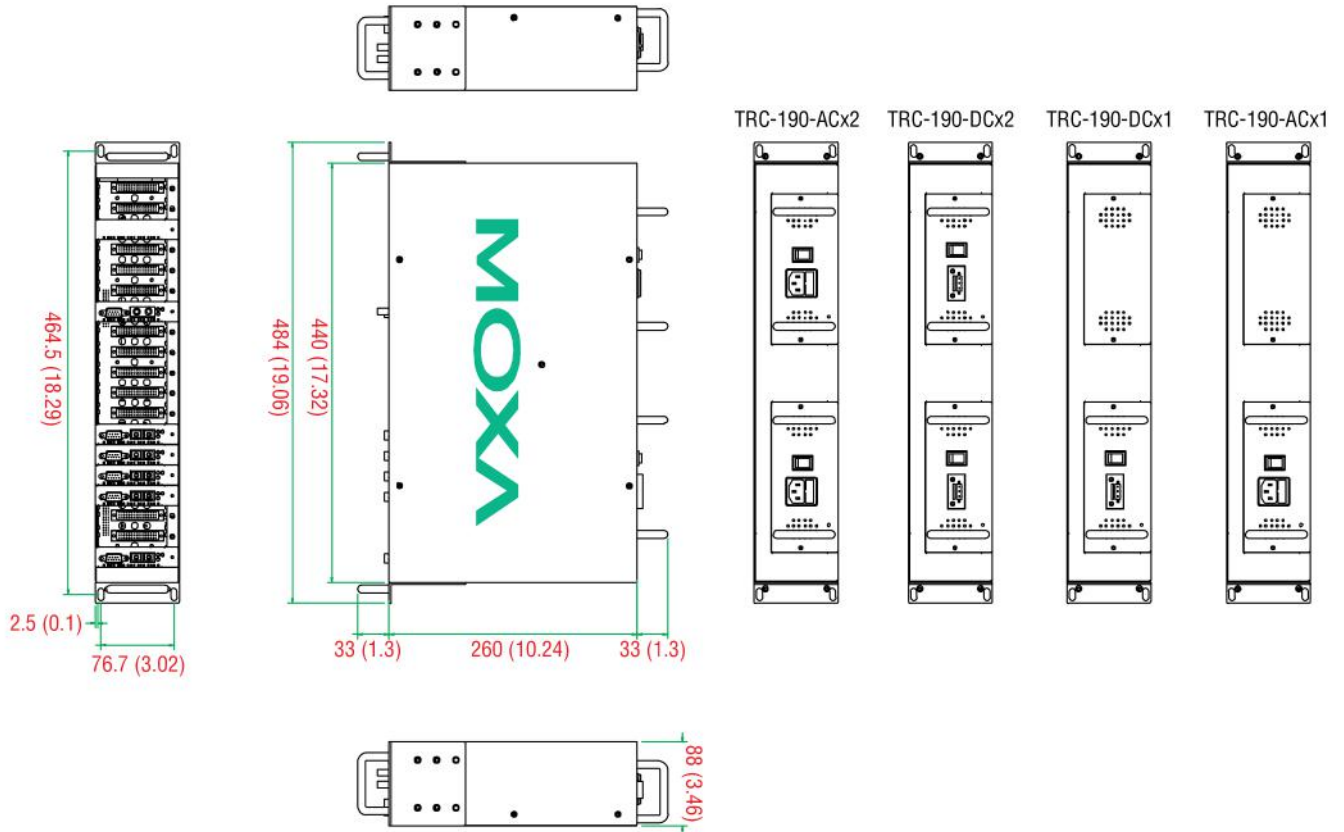

Ordering Information

Model Name	Input Voltage
TRC-190-AC	100-240 VAC (47-63 Hz)
TRC-190-DC-48	48 VDC

Accessories (sold separately)

Brackets

Plate-1	Chassis converter bracket accessory package, 9 brackets, 9 screws (FMS M3 X 6 mm)
BKT-PWR	Chassis converter rackmount kit accessory package, 2 L-shaped metal plates, 8 screws (FMS M4 x 6 mm)

Communication Modules

TCF-142-M-SC-RM	RS-232/422/485 to multi-mode fiber slide-in module converter, SC connector
TCF-142-M-ST-RM	RS-232/422/485 to multi-mode fiber slide-in module converter, ST connector
TCF-142-S-SC-RM	RS-232/422/485 to single-mode fiber slide-in module converter, SC connector
TCF-142-S-ST-RM	RS-232/422/485 to single-mode fiber slide-in module converter, ST connector
CSM-G200-1221	10/100/1000BaseT(X)-to-100/1000BaseSFP slide-in media converter module
CSM-200-1213	10/100BaseT(X) to 100BaseFX slide-in module media converter, multi-mode ST connector
CSM-200-1214	10/100BaseT(X) to 100BaseFX slide-in module media converter, multi-mode SC connector
CSM-200-1218	10/100BaseT(X) to 100BaseFX slide-in module media converter, single-mode SC connector

Power Cords

PWC-C13AU-3B-183	Power cord with AU plug, 1.83 m
PWC-C13CN-3B-183	Power cord with three-prong CN plug, 1.83 m
PWC-C13EU-3B-183	Power cord with EU plug, 1.83 m
PWC-C13JP-3B-183	Power cord with JP plug plug, 7A/125V, 1.83 m
PWC-C13UK-3B-183	Power cord with UK plug, 1.83 m
PWC-C13US-3B-183	Power cord with US plug, 1.83 m

Power Supplies

PWR-190-AC	110 to 240 VAC power supply for the TRC-190-AC
PWR-190-DC-48	36 to 53 VDC power supply for the TRC-190-DC-48
ME-10-T	1-slot chassis with redundant 12 to 48 VDC power inputs

© Moxa Inc. All rights reserved. Updated Jul 28, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.