

# MD-226 Series

**26-inch wide screen marine display, 16:10 aspect ratio,  
full HD 1920 x 1200 resolution**



- > 26-inch Full-HD display, 16:10 aspect ratio
- > High quality LCD with LED backlight
- > Color calibrated for ECDIS compliance
- > Full range dimming, 0 to 100%
- > SavvyTouch™ display controls
- > Built-in RS-232/422/485 interfaces
- > Dual power supplies (AC & DC)
- > IP54 (front) / IP22 (rear) rated
- > Optical bonding available on request



## Introduction


The MD-226 series of marine displays comes with full range dimming, wide viewing angles, and optional optical bonding. These displays are built with a small-profile modular design that allows easier integration into industrial marine systems, reducing deployment costs and overall time-to-market.

The innovative and user-friendly SavvyTouch display controls offer several unique features not found on any other marine display console: a proximity sensor for convenient adjustments in dark conditions, an info button for immediate updates on hardware status, and a quick-switch to adjust between day, dusk, and night-time ECDIS modes (for color-calibrated ECDIS models only).


The MD-226 series displays are compliant with IEC 60945, DNV, and IACS-E10, verifying their resilience and durability in maritime conditions. Their IP54 rated enclosure provides additional protection against dust and moisture above and beyond the limits established by these international standards bodies.

ECDIS-approved models are also available, offering an excellent HMI solution for ECDIS charting and navigation stations.

## Appearance

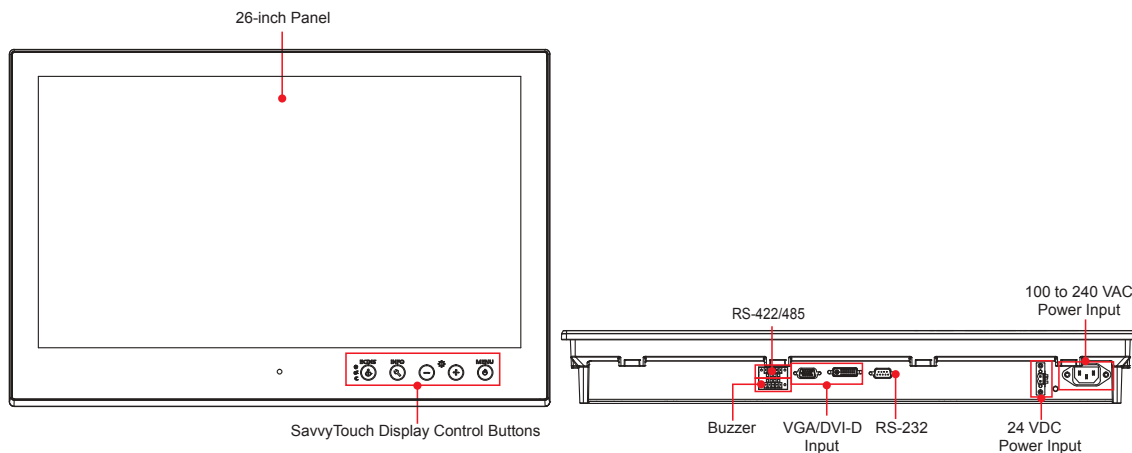

## Dimensions

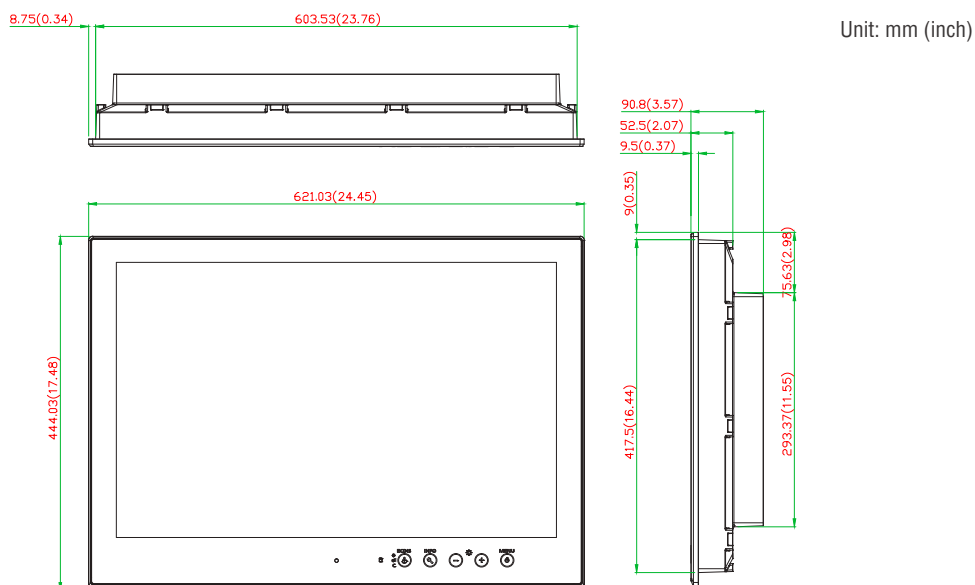

## Specifications

### Display

**Panel Size:** 26" viewable image size  
**Panel Type:** MVA  
**Aspect Ratio:** 16:10  
**Pixels:** 1920 x 1200 (WUXGA)  
**Pixel Pitch (RGB):** 0.2865 (H) x 0.2865 (V) mm  
**Response Time:** 15 ms (gray to gray)  
**Contrast Ratio:** 1500:1  
**Light Intensity:** 300 cd/m<sup>2</sup>  
**Viewing Angles:** 176°/176°  
**Active Display Area:** 550.08 (H) x 343.8 (V) mm  
**Max. No. of Colors:** 16.7M / 8-bit color  
**Display Interface:**  

- 1 VGA input
- 1 DVI-D input

**Resolution:**  

- VGA: 640 x 480
- SVGA: 800 x 600
- XGA: 1024 x 768
- SXGA: 1280 x 1024
- WSXGA+: 1920 x 1080
- WUXGA: 1920 x 1200

### Serial Interface

**Serial Standards:** 1 RS-232 port (male DB9), 1 RS-422/485 port (Euroblock)

**Optical Isolation Protection:** 4 kV

### Serial Signals

**RS-232:** TxD, RxD, DTR, DSR, RTS, CTS, DCD, GND  
**RS-422:** TxD+, TxD-, RxD+, RxD-, GND  
**RS-485-2w:** Data+, Data-, GND

### Front Panel

**LEDs:** MENU, Brightness, INFO, ECDIS, Day/Dusk/Night  
**Smart OSD:** Yes

### Physical Characteristics

**Housing:** Aluminum sheet metal  
**Weight:** 15.2 kg  
**Dimensions:** 621 x 440 x 90 mm (24.45 x 17.48 x 3.57 in)  
**Mounting:** VESA, panel, or desktop mountings

### Environmental Limits

**Operating Temperature:** -15 to 55°C (5 to 131°F)  
**Storage Temperature:** -20 to 60°C (-4 to 140°F)  
**Ambient Relative Humidity:** 5 to 95% (non-condensing)  
*Note: If you expect the storage temperature to exceed 40°C, please ensure that the ambient relative humidity remains below 95%.*

### IP Rating:

- Front: IP54
- Rear: IP22

### Anti-Vibration:

- 0.7 g @ DNV 2.4 (Class A), sine wave, 2-100 Hz, 1 Oct./min., 1.5 hr per axis

### Power Requirements

#### Input Voltage:

24 VDC, 6 A or (18 to 34 VDC, 8 A max.), screw-type terminal block  
 100 to 240 VAC, 50 to 60 Hz, 2 A, AC power inlet

### Standards and Certifications

**Safety:** UL 60950-1, EN 60950-1, IEC 60950-1

**EMC:** EN 55032/24

**EMI:** CISPR 32, FCC Part 15B Class A

#### EMS:

IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV  
 IEC 61000-4-3 RS: 80 MHz to 1 GHz, 3 V/m  
 IEC 61000-4-4 EFT: Power 1 kV; Signal 0.5 kV  
 IEC 61000-4-5 Surge: Power 2 kV; Signal: 1 kV  
 IEC 61000-4-6 CS: Signal: 1 kV  
 IEC 61000-4-8

**Marine:** IEC 60945 4th, DNV, IACS E10, IEC 61174

**Green Product:** RoHS, cRoHS, WEEE

### Warranty

**Warranty Period:** 1 year

**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

We recommend taking the following precautions to minimize heat build-up within the display:

- Position the display within  $\pm 40^\circ$  of the vertical.
- Install an external fan to increase airflow upwards through the display if (a) the display is not positioned within  $\pm 40^\circ$  of the vertical, (b) the ambient temperature exceeds  $25^\circ\text{C}$ , or (c) the display is used in a location with minimal ventilation.

#### Important Safety Precaution:

Even though the display is rated to operate within the IEC 60945 standard of  $-15$  to  $55^\circ\text{C}$ , it is best to ensure that the ambient temperature does not exceed  $25^\circ\text{C}$ . Doing so will increase the life of your display and minimize service costs.

## : Ordering Information

### Available Models

**MD-226X:** 26-inch display with 16:10 aspect ratio, 1920 x 1200 resolution, LED backlighting, RS-232/422/485 serial ports, dual-power supply (AC/DC)

**Optional Accessories** (can be purchased separately, for AC power input)

**PWC-C13US-3B-183:** Power cord with 3-pin connector, USA plug

**PWC-C13EU-3B-183:** Power cord with 3-pin connector, Euro plug

**PWC-C13UK-3B-183:** Power cord with 3-pin connector, British plug

**PWC-C13AU-3B-183:** Power cord with 3-pin connector, Australian plug

**PWC-C13CN-3B-183:** Power cord with 3-pin connector, Chinese plug

**Optional Mounting/Bracket Kits** (can be purchased separately)

**MPC-MD-2-24-26-DMTK w/o hinge:** Desktop mounting kit without hinge

**MPC-MD-2-24-26-DMTK w/ hinge:** Desktop mounting kit with hinge

### Package Checklist

- MD-226 display
- VGA cable
- DVI-D cable
- 2-pin terminal block x 1
- 5-pin terminal block x 2
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card