

EPM-3112 Expansion Module

Expansion peripheral modules (EPM) for the V2400 Series



Features and Benefits

- 2 isolated CAN ports with DB9 connectors


Certifications



Introduction

Moxa's EPM-3112 expansion module comes with 2 isolated CAN ports with DB9 connectors that can be used with Moxa's V2426 embedded computers to give end users the best flexibility for setting up and expanding a variety of industrial applications.

Appearance

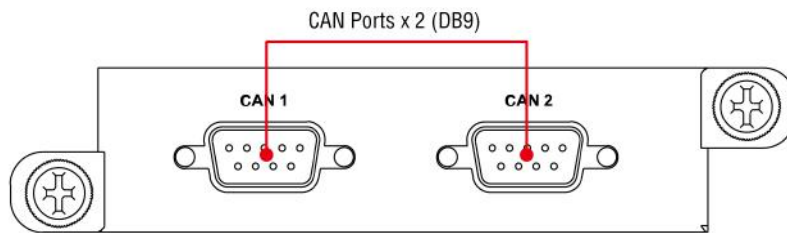

Specifications

CAN Interface

No. of Ports	2
Connector	DB9 male
Industrial Protocols	CAN 2.0A, CAN 2.0B
Signals	CAN_H and CAN_L CAN_H CAN_L
Isolation	2 kV
Speed	1 Mbps

Physical Characteristics

Dimensions (without ears)	104 x 121 x 34 mm (4.09 x 4.76 x 1.34 in)
Weight	127 g (0.28 lb)

Environmental Limits

Operating Temperature -25 to 55°C (-13 to 131°F)

Ordering Information

Model Name	miniPCIe Expansion Slots	SIM Slots	RS-232/422/485 Ports	CAN Ports	Digital Input Channels	Digital Output Channels	Operating Temp.	Conformal Coating
EPM-3112	-	-	-	2	-	-	-25 to 55°C	-

© Moxa Inc. All rights reserved. Updated Nov 12, 2018.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.