

# MiiNePort E1 Series

10/100 Mbps embedded serial device servers



## Features and Benefits

- Same size as an RJ45 connector—only 33.9 x 16.25 x 13.5 mm
- Extremely low power consumption
- Uses the MiiNe, Moxa's second-generation SoC
- NetEZ technology makes integration incredibly easy
- Variety of operation modes, including Real COM, RFC2217, TCP, and UDP

## Certifications




## Introduction

Moxa's MiiNePort E1 embedded device servers are designed for manufacturers who want to add sophisticated network connectivity to their serial devices with minimal integration effort. The MiiNePort E1 is empowered by the MiiNe, Moxa's second-generation SoC, which supports 10/100 Mbps Ethernet, serial baudrates up to 921.6 kbps, a versatile selection of ready-to-use operation modes, and requires only a small amount of power. By using Moxa's innovative NetEZ technology, the MiiNePort E1 can be used to convert any device with a standard serial interface to an Ethernet enabled device in no time. In addition, the MiiNePort E1 is the size of an RJ45 connector, making it easy to fit into virtually any existing serial device.

## Moxa's Second-Generation SoC

The MiiNe was created to provide manufacturers with a competitive embedded serial-to-Ethernet solution. The MiiNePort E1, which uses the MiiNe for its SoC, is one of the world's tiniest embedded device servers and has the lowest power consumption of any similar product. The MiiNe has the following features:

- Designed for 1 or 2-port serial-to-Ethernet applications
- Uses a 32-bit Arm 7 core
- Uses Moxa's own advanced UART technology
- 2 MB Flash and 4 MB SDRAM memory built in

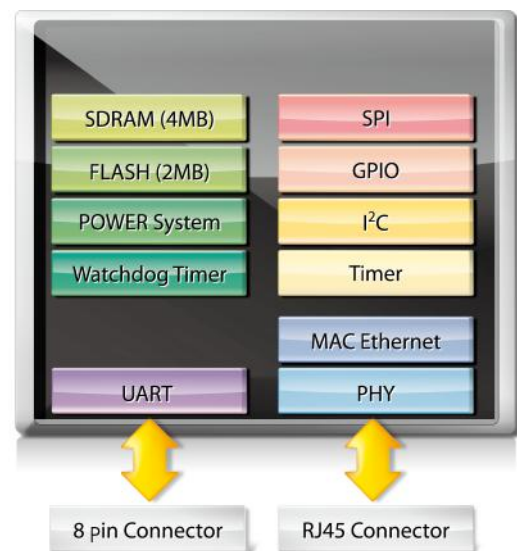

## NetEZ Technology

Moxa's NetEZ technology makes the MiiNePort E1 one of the most user-friendly embedded device servers by promising ease-of-use with minimal integration work required. Moxa's NetEZ technology gives serial device manufacturers a range of powerful tools for integrating Ethernet capability into serial devices. These tools include EXTrigger, MCSC (multi-channel serial communications), Serial Communication Mode (SCM), and AutoCFG. With EXTrigger, resetting and restarting the device can be done in an instant by simply pressing the EXTrigger button, making troubleshooting much easier. There is no need to open the device's casing or interrupt operations. MCSC provides dual connections and dual channels for multitask applications, which enable the device to be a server and client at the same time. The MiiNePort's user-friendly SCM allows users to configure the network through serial communications inside the serial device. This function provides another option for on-site troubleshooting without an Internet connection. AutoCFG enables auto-configuration with mass configuration software in order to place default settings on multiple modules simultaneously. This technology not only accelerates time-to-market but also prevents manual errors.

## Specifications

### Embedded System

CPU	32-bit Arm Core
-----	-----------------

### Memory

Flash	2 MB
SDRAM	4 MB

### Input/Output Interface

Configurable DIO Channels (by software)	1
Digital Input Channels	1
Digital Output Channels	1

### Ethernet Interface

10/100BaseT(X) Ports, Auto MDI/MDI-X	8-pin RJ45
Magnetic Isolation Protection	1.5 kV (built-in)

### Ethernet Software Features

Configuration Options	Web Console (HTTP), Windows Utility, Telnet Console, Serial Console
Management	ARP, BOOTP, Device Search Utility (DSU), DHCP Client, HTTP, IPv4, SMTP, SNMPv1, TCP/IP, Telnet, TFTP, ICMP, ICMP
Windows Real COM Drivers	Windows 95/98/ME/NT/2000, Windows XP/2003/Vista/2008/7/8/8.1/10 (x86/x64), Windows 2008 R2/2012/2012 R2 (x64), Windows Embedded CE 5.0/6.0, Windows XP Embedded
Fixed TTY Drivers	SCO UNIX, SCO OpenServer, UnixWare 7, QNX 4.25, QNX 6, Solaris 10, FreeBSD, AIX 5.x, HP-UX 11i, Mac OS X
Linux Real TTY Drivers	Kernel version: 2.4.x, 2.6x, 3.x, 4.2
Android API	Android 3.1.x and later

### Serial Interface

No. of Ports	1
Serial Standards	TTL
Operation Modes	Real COM mode, RFC2217 mode, TCP Client mode, TCP Server mode, UDP mode
Baudrate	MiiNePort E1 Series: 50 bps to 230.4 kbps MiiNePort E1-H Series: 50 bps to 921.6 kbps
Data Bits	5, 6, 7, 8
Stop Bits	1, 1.5, 2
Parity	None, Even, Odd, Space, Mark
Flow Control	None, RTS/CTS, XON/XOFF

### Serial Signals

TTL	TxD, RxD, RTS, CTS, RST (reset circuit), GND
-----	--

### NetEZ Technology

NetEZ Functions	ExTrigger, SCM (Serial Command Mode), AutoCFG, MCSC (Multi-Channel Serial Communication)
-----------------	--

## Power Parameters

Input Current	MiiNePort E1 Series: 160 mA @ 3.3 VDC max. MiiNePort E1-H Series: 195 mA @ 3.3 VDC max.
Input Voltage	3.3 VDC

## Physical Characteristics

Dimensions	MiiNePort E1-ST Series: 140 x 100 mm (5.51 x 3.94 in) MiiNePort E1/E1-H Series: 33.9 x 16.25 x 13.5 mm (1.33 x 0.64 x 0.53 in)
Weight	MiiNePort E1/E1-H Series: 9 g (0.02 lb)
Form Factor Type	Drop-in modules

## Environmental Limits

Operating Temperature	Standard models: 0 to 55°C (32 to 131°F) Wide Temp. models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 60°C (-40 to 140°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 0.5 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs
Environmental Testing	IEC 60068-2-1 IEC 60068-2-3
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6

## Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

## MTBF

Time	5,515,294 hrs
Standards	Telcordia SR332

## Warranty

Warranty Period	5 years
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Package Contents

Device	1 x MiiNePort E1 Series device server
Cable	1 x Ethernet, crossover cable (-ST models) 1 x null modem serial cable (-ST models)

