

XPPC 16-200

15.6" TFT FHD 16:9 Slim Bezel, Multi-touch Computer
Powered by 11th Generation Intel® Core™ Processor



Main Features

- 15.6" TFT FHD 16:9 panel
- 10 Points P-Cap multi-touch with slim bezel design
- IP65 protection on the front
- Support: VESA/Panel/Openframe Mount
- 11th Generation Intel® Tiger Lake-UP3 Core™ processor SoC
- 1 x 260-pin DDR4 SO-DIMM up to 32G
- Onboard M.2 2280 Key M with PCIe x4 signal for storage module
- Onboard M.2 2230 Key E for optional Wi-Fi modules
- Support power input 12 VDC

Product Overview

The 15.6" fanless touch computer XPPC 16-200 incorporating an industrial motherboard is intended for versatile industrial applications. XPPC 16-200 has a touch screen LED backlight LCD panel with 1920 x 1080 (FHD) resolution and 450-nit brightness. The front panel which adopts flush design and complies with IP65 standard by panel mount makes it the perfect fit in industrial applications. XPPC 16-200 powered by Intel® Tiger Lake-UP3 Core™ SoC. XPPC 16-200 has slim design and weight optimization. XPPC 16-200 support multi-mounting choice based on different application. XPPC 16-200 can be applied in different situations. For example: hotel self-check in system, department store, welcome board and advertisement.

Specifications

Panel

- LCD size: Innolux G-series 15.6", 16:9
- Resolution: Full HD 1920 x 1080
- Luminance
 - LCD panel: 450cd/m2
 - XPPC PCAP touch: 405cd/m2
- Contrast ratio: 700
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)

Touch Screen

- 10 Points P-Cap (projected capacitive touch)
- Optical bonding
- Glass surface treatment: AS (Anti-Smudge Coating for easy cleaning)

System

- XPPC 16-200-i3
 - Onboard 11th Generation Intel® Core™ i3-1115G4E processor, Dual Core, 2.2 GHz base frequency, 6M Cache (formerly Tiger Lake-UP3)
 - Intel® UHD Graphics 630 on i3 processor
- XPPC 16-200-i5 (by request)
 - Onboard 11th Generation Intel® Core™ i5-1145G7E processor, Dual Core, 1.5 GHz base frequency, 8M Cache
 - Intel® Iris® X® Graphics on i5 processor

Main Memory

- 1 x 260-pin DDR4 SO-DIMM, supports non-ECC, un-buffered memory up to 32G

Storage Device

- 1 x M.2 2280 Key M SSD, support PCIe x4

Expansion

- 1 x M.2 2230 Key E, support optional Wi-Fi modules


Rear I/O

- 1 x RS232/422/485
- 1 x 12V DC Jack
- 2 x RJ45 Intel® Gigabit LAN port
- 1 x DP++
- 1 x HDMI 2.0
- 4 x USB 3.0
- 1 x Line-out
- LED for power on/off
- Power switch

Front I/O

- 2 x Antenna hole

Dimension Drawing

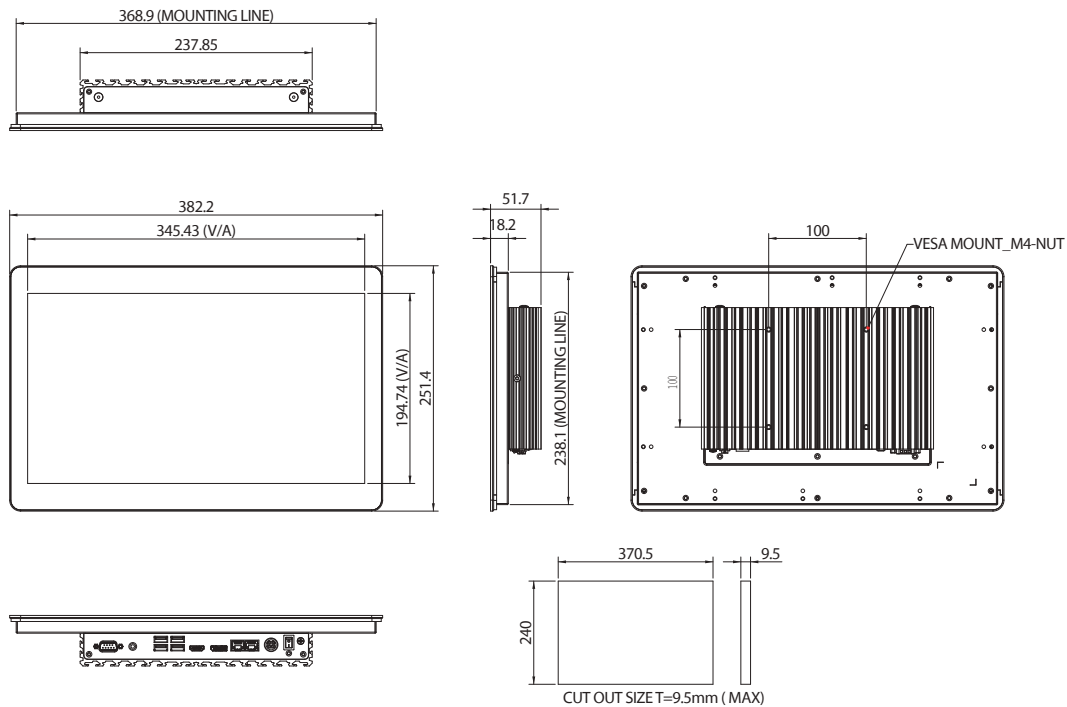

Mechanical & Environment

- Color/material: black silver/metal sheet
- Support
 - VESA mount 100mm x 100mm
 - Panel mount
 - Open frame

Environment

- Vibration
 - IEC 68 2-64
 - 2Grms @ sine, 5~500Hz, 1hr/axis
 - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock
 - IEC 68 2-27
 - 50g peak acceleration (11 msec. duration)
- Temperature
 - Operating temperature: 0°C~50°C
 - Storage temperature: -20°C~60°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90%

Dimensions

- System: 382.2mm x 251.4mm x 51.7mm
- System weight: 3.0kg
- Package: 476mm x 355mm x 206mm
- Package weight: 4.7kg

Power Supply

- 1 x External 96W AC/DC power adapter with lock (power adapter is included in accessory)

- Input: 100VAC to 240VAC
- Output: DC+12VDC

Certifications

- CE (EN55035 + EN55032)
- FCC Class A (EMI Part 15B)
- LVD (EN62368-1)

OS Support Lists

- Win10 64-bit
- Linux

Ordering Information

Barebone

- **XPPC 16-200-i3 (P/N: 10W30XPPC11X0)**
15.6" FHD LED P-CAP touch computer, Intel® Tiger Lake Core i3-1115G4E
- **XPPC 16-200-i5 (P/N: 10W30XPPC13X0)**
15.6" FHD LED P-CAP touch computer, Intel® Tiger Lake Core i5-1145G7E (by request)
- **Panel Mount Kit (P/N: 88W30XPPC04X0)**
- **Open Frame Kit (P/N: 88W30XPPC05X0)**