



Main Features

- Intel® Celeron® N3060
- HDMI (4K resolution) and VGA independent displays USB 3.0 support
- WLAN support
- Compact and fanless design

Product Overview

Powered by Intel® Celeron® N3060 SoC processor, NDiS B327 digital signage player can handle very rich multimedia contents. With Intel® processor low power consumption feature. In addition, the Intel® Celeron® Core™ processors deliver significant improvements up to two and a half times the performance in graphics offering stunning visuals for compelling 4K content creation and media playback. NDiS B327 supports display output by HDMI and VGA ports. Integration flexibility with various peripherals such as touchscreen displays, scanners, readers, and many more. NDiS B327 the fanless durability further extends to semi-outdoor usage like QSR drive through kiosks, box office displays, information stands, bus stops, or digital transit information signs. It is also ideal as a digital signage player delivering enhanced performance and new immersive experiences for advertising, hospitality and brand promotion applications.

Specifications

CPU Support

- Intel® Celeron® SoC processor N3060 dual core 1.6GHz up to 2.28GHz

Graphic

- Intel® integrated HD 400 graphicse

Main Memory

- 2 x 204-pin SO-DIMM sockets, supports DDR3L 1600 MHz non- ECC, un-buffered memory up to 8G (single socket max. 4GB)

I/O Interface-Front

- 2 x USB 2.0
- 2 x USB 3.0
- 1 x DB9 for RS232 (cable)
- 1 x Storage active LED
- 1 x Power switch with LED

I/O Interface-Rear

- 1 x DC-in jack, 2.5/5.5mm (19V DC)
- 1 x VGA (1920 x 1200 resolution)
- 1 x HDMI (4K resolution)
- 2 x Antenna hole

- 2 x USB 3.0
- 1 x RJ45 with LEDs for Gigabit LAN
- 1 x Line-out
- 1 x Mic-in

Storage Device

- 1 x 2.5" SATA SSD bay
- 1 x M.2 2242 SSD, SATA signal

Expansion

- 1 x mini-PCIe full size connector, USB+PCIe signal, support Wi-Fi
- 1 x M.2 B key 2242 slot, SATA support

Dimensions

- 190mm (W) x 149mm (D) x 25mm (H)


Power Supply

- DC power input +19V

Environment

- Operating temperature: @ 100% CPU loading and component thermal profile from 0°C~40°C
- Storage temperature: -20°C~80°C
- Humidity: 95% (non-condensing)

Dimension Drawing

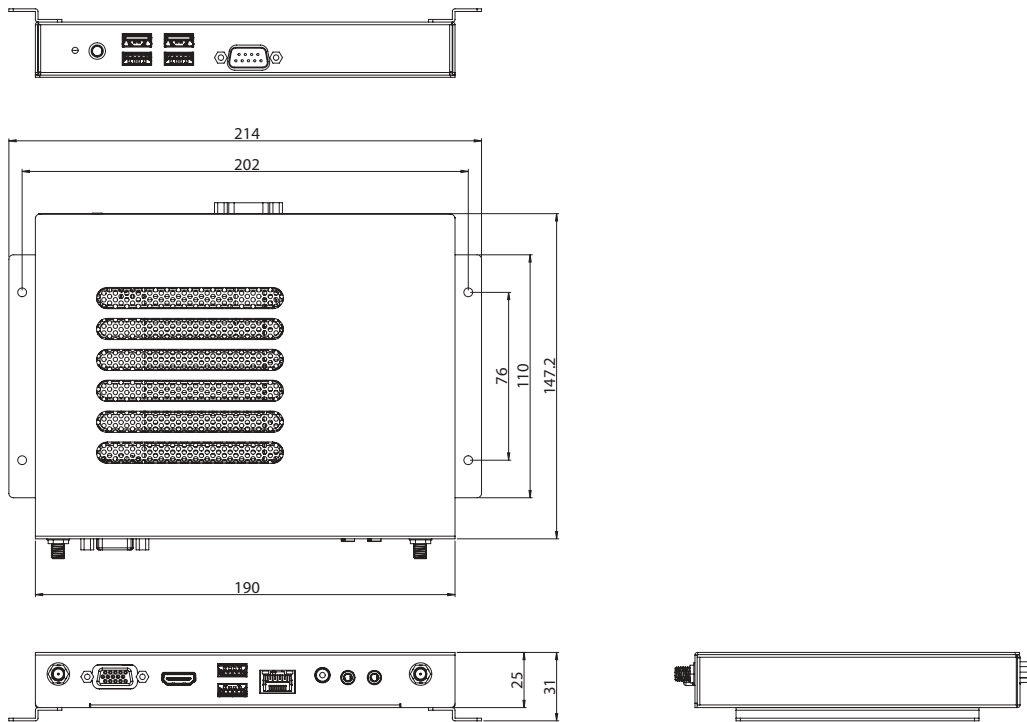

Certification

- CE approval
- FCC Class A

Operating System

- Win7/ Win10

Ordering Information

- **NDiS B327 (P/N: 10W00B32700X0)**
Intel® Celeron® N3060 dual core fanless system