



Main Features

- On-board Intel® Celeron® N3060 processor
- Support one DDR3L SO-DIMM, up to 8GB
- Support multiple display from VGA and DVI-D
- DC input 12V
- Fanless design
- 2 x GLAN, 4 x USB 3.0, 1 x USB 2.0, 5 x COM
- Expansion : 1 x full-size mIni card, 1 x M.2 (M-Key)

Product Overview

IKS 621A is fanless box PC based on Intel® Celeron® N3060 SoC (formerly codenamed "Braswell"). IKS 621A operates from 0°C to 50°C with low power consumption. This fanless box is aimed at embedded applications for outdoor or semi-outdoor environment. Such as kiosk, small smart equipment, outdoor systems installed in harsh environments, home automation and thin clients...etc.

It is low profile designed in a compact chassis, 289.3mm (W) x 189mm (D) x 39.5mm (H), with smart airflow . IKS 621A supports a maximum memory of 8GB DDR3L SDRAM. Also, it offers display outputs of VGA and DVI-D. The flexibility of modularized selection meets different application in the field.

Specifications

CPU Support

- Intel® Celeron® N3060 processor, 2C/2T up to 2.48GHz, 6W TDP

Display

- 1 x DVI-D connector (resolution up to 1920 x 1200@60Hz)
- 1 x VGA connector (resolution up to 1920 x 1200@60Hz)

System

- 1 x DDR3L 1600 MHz SO-DIMM, max. 8GB, non-ECC, un-buffered memory
- 2 x Realtek PCIe Gb LAN 8111G GbE
- 5 x Serial ports (4 x RS232, 1 x RS232/485/422 by COM1)
- Support Realtek HD Audio (Line-out, Mic-in)

Storage Device

- 1 x SATA 6.0Gb/s
- 1 x M.2 M key (default: 2280)

Expansion

- 1 x Full size mini card slot (PCIe/USB)

Power Requirements

- Single power 12V DC input

Front I/O

- ATX power on/off button
- 1 x USB 2.0

Rear I/O

- 2 x GLAN
- 4 x USB 3.0
- 1 x DVI-D display output
- 1 x VGA display output
- 5 x Serial ports
- 1 x Line-out, 1 x Mic-in
- 1 x Lockable DC power jack

Mechanical & Environment

- Operating temperature: 0°C~50°C
- Storage temperature: -20°C~80°C
- Relative humidity: operating 10%~90%, non-condensing


Dimension

- Display head: 289.3 x 189 x 39.5 (W x D x H) (mm)

Weight

- 1.3kg

Dimension Drawing

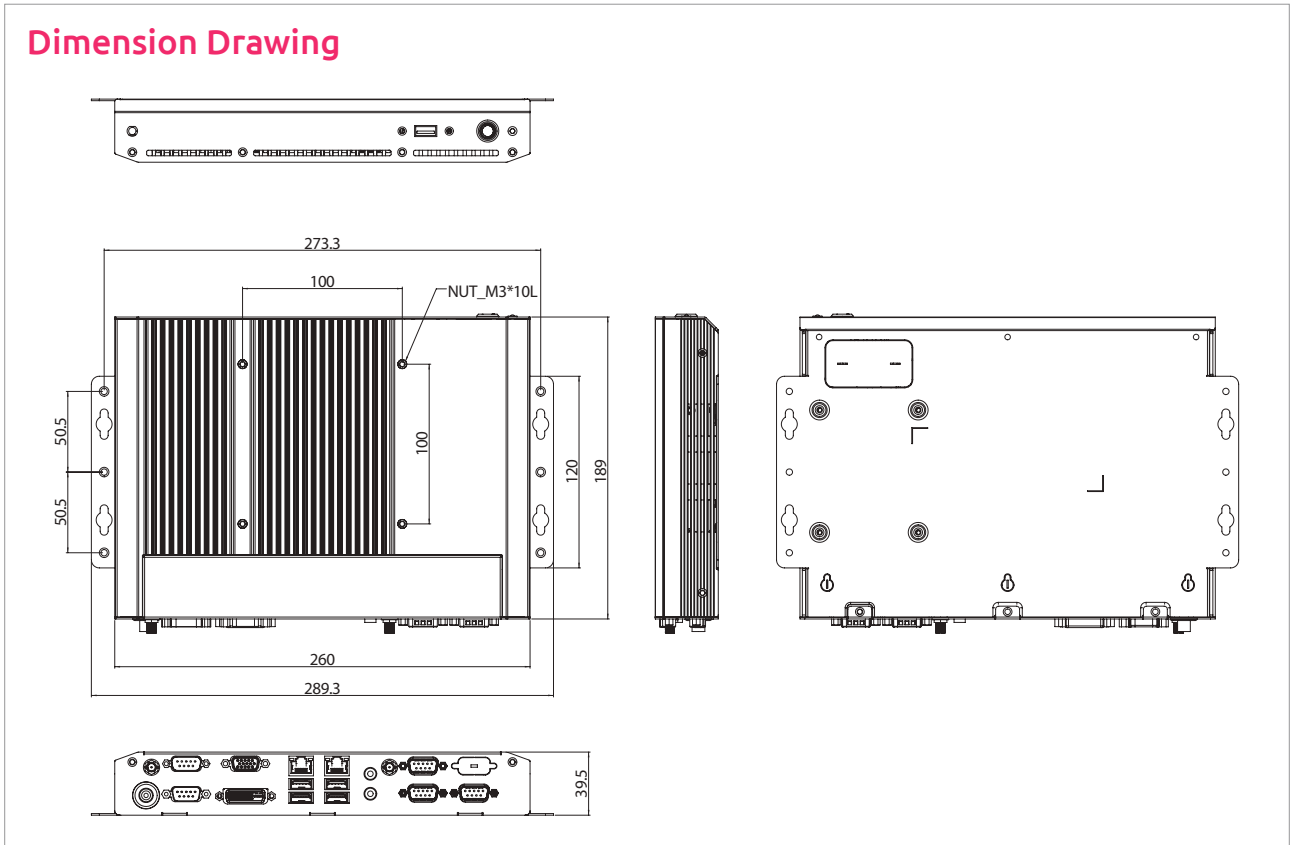

Operating System

- Windows 7 32/64-bit
- Windows 10 64-bit
- Linux Fefora

Certificate

- EMC & Safety
- CE/FCC Class A

Ordering Information

Barebone

♦ IKS 621A-N3060 (P/N: 10IK0062100X0)

On-board Intel® Celeron® N3060 processor, w/VGA/DVI-D, 2 x Gigabit LAN, 4 x USB 3.0, 1 x USB 2.0, 5 x Serial port
 Include 12V, 60W power adapter w/o power cord (P/N: 7400060025X00)