

ANT-WDB-ONM-0707 Series

07 dBi at 2.4 GHz and 07 dBi at 5 GHz, N-type (male), dual-band omnidirectional antenna



Features and Benefits



- High-gain antenna to enhance performance
- Waterproof N-type connector
- Lightweight
- Housing provides IP65 protection
- -40 to 85°C operating temperature range

Introduction



The ANT-WDB-ONM-0707 is an omnidirectional dual-band high-gain antenna with a waterproof N-type male connector. The IP65-rated housing and wide operating temperature range of -40 to 85°C make it suitable for outdoor use.

Field Patterns



X-Y Plane

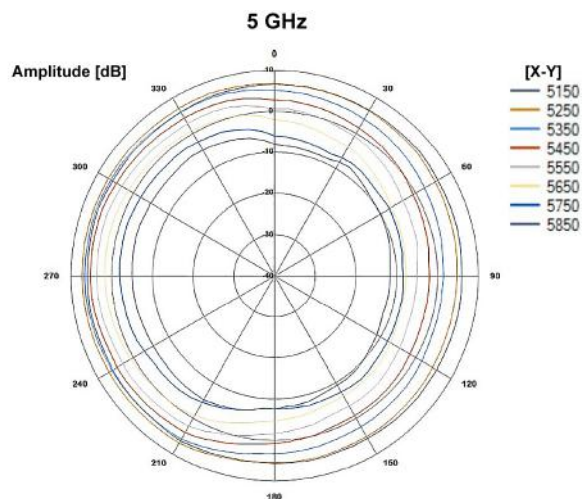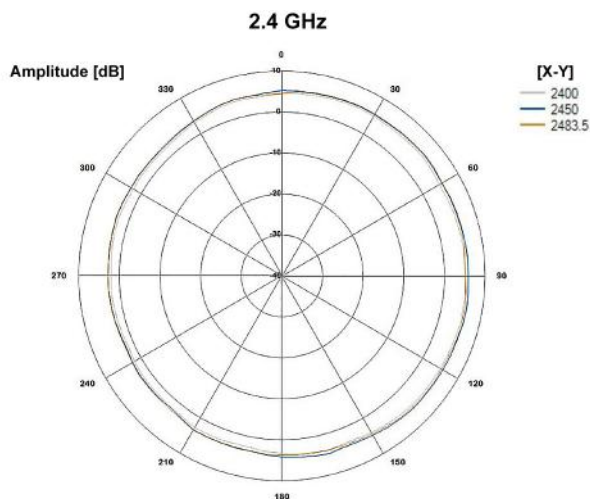

X-Z Plane

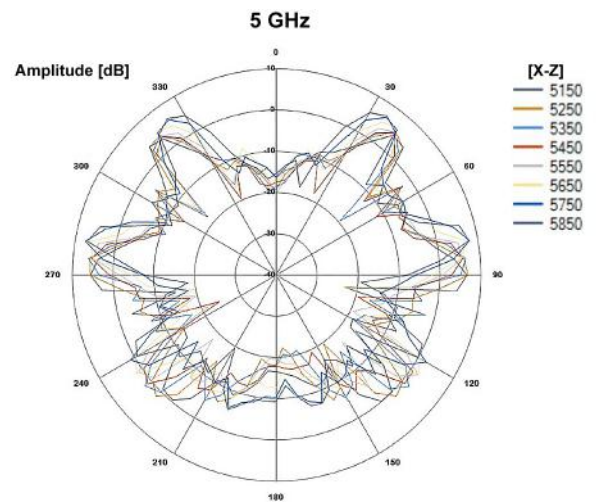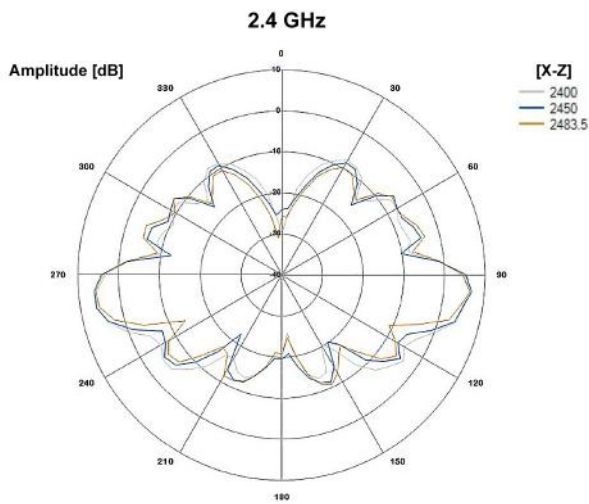

Y-Z Plane

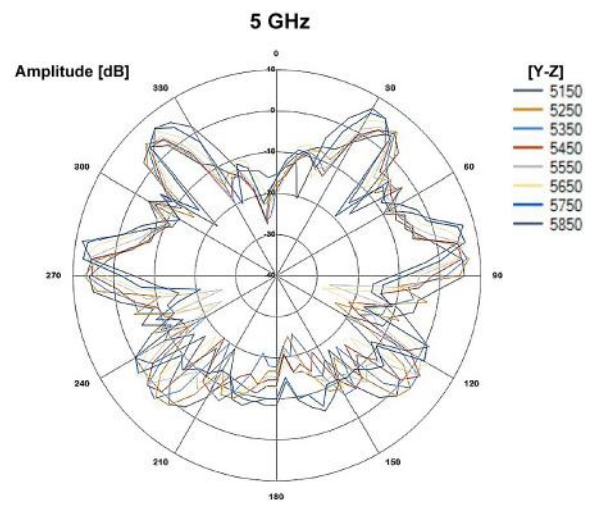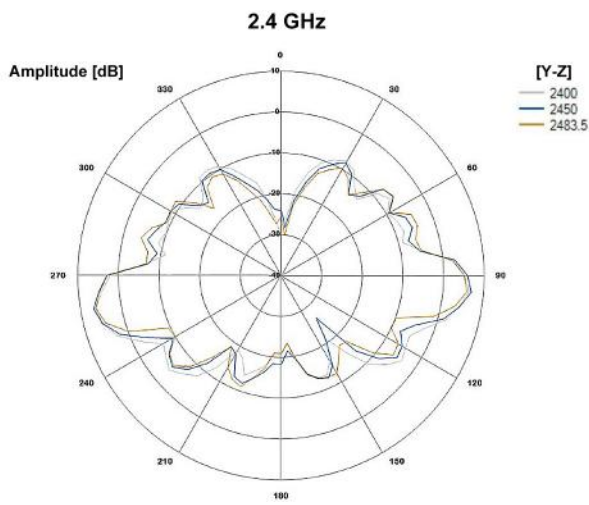

Specifications

Antenna Characteristics

Frequency	2.4 to 2.4835 GHz or 5.15 to 5.85 GHz
Antenna Type	Omni-directional
Typical Antenna Gain	7/7 dBi
Impedance	50 ohms
HPBW/Horizontal	360°
V.S.W.R.	1:2.5 max.
Power Handling	10 W (max.)
Polarization	Vertical
Connector	N-type (male)


Physical Characteristics

IP Rating	IP65
Dimensions	Diameter: 20 mm (0.79 in) Length: 528 mm (20.79 in)

Weight	152 g (0.34 lb)
Radome Color	White
Radome Material	Fiberglass
Installation	Straight mount
Environmental Limits	
Operating Temperature	-40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Warranty	
Warranty Period	1 year
Details	See www.moxa.com/warranty

Dimensions

Unit: mm

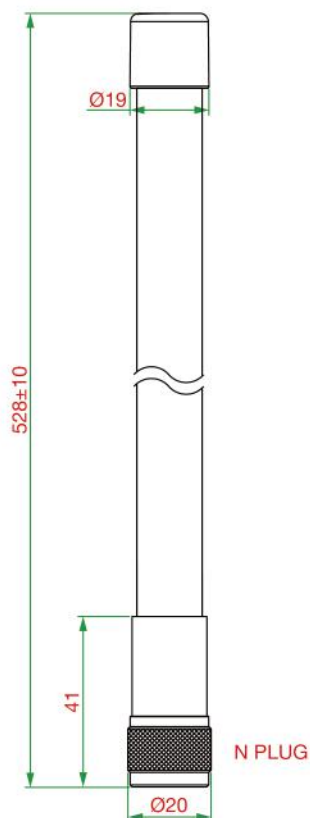

Ordering Information

Model Name	Frequency	Antenna Type	Antenna Gain	Connector Type
ANT-WDB-ONM-0707	2.4 to 2.4835 GHz, 5.15 to 5.85 GHz	Omnidirectional	7 dBi at 2.4 GHz, 7 dBi at 5 GHz	N-type (male)

© Moxa Inc. All rights reserved. Updated Jul 22, 2022.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.