

CP-602E-I Series

2-port CAN interface PCI Express boards with 2 kV isolation



Features and Benefits

- Supports CAN 2.0A and CAN 2.0B
- Two independent CAN communication ports
- CAN transfer rate up to 1 Mbps
- 2 kV electrical isolation
- LED for transmit/receive status on each port
- Optional 120-ohm terminal resistor for CAN bus network
- DLL library and examples included
- Windows driver provided

Certifications



Introduction

Moxa's CP-602E-I CAN (Controller Area Network) interface board supports the PCI Express interface. As a standalone CAN controller, the CP-602E-I is a cost-effective solution that provides two active CAN controllers with a DB9 connector on the same board. The CP-602E-I CAN interface board uses the NXP SJA1000 and transceiver PCA82C251, which provide bus arbitration and error detection. The -40 to 85°C wide operating temperature (CP-602E-I-T only) and 2 kV isolation make the boards suitable for use in harsh industrial environments.

Specifications

CAN Interface	
Baudrate	10/20/50/125/250/500/800/1000 kbps, user-defined
Connector	DB9 male
No. of Ports	2
Environmental Limits	
Operating Temperature	Standard Models: 0 to 55°C (32 to 131°F) Wide Temp. Models: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Standards and Certifications	
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11

Declaration

Green Product

RoHS, CRoHS, WEEE

MTBF

Time

4,645,502 hrs

Standards

Telcordia SR332

Warranty

Warranty Period

5 years

Details

See www.moxa.com/warranty

Package Contents

Device


1 x CP-602E-I Series serial board

Documentation

1 x quick installation guide
1 x substance disclosure table
1 x warranty card

Dimensions

Unit: mm (inch)

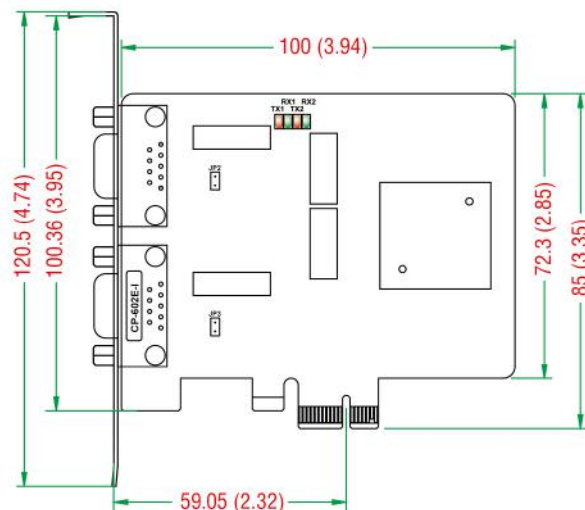

Ordering Information

Model Name	Serial Bus	CAN Specification	No. of Serial Ports	Serial Isolation Protection	Operating Temp.
CP-602E-I w/o Cable	PCI Express	CAN 2.0 A/B	2	2 kV	0 to 55°C
CP-602E-I-T w/o Cable	PCI Express	CAN 2.0 A/B	2	2 kV	-40 to 85°C

Accessories (sold separately)

Connectors

Mini DB9F-to-TB

DB9 female to terminal block connector

Cables

CBL-F9M9-150

DB9 female to DB9 male serial cable, 1.5 m

CBL-F9M9-20

DB9 female to DB9 male serial cable, 20 cm

