

CP-602U-I Series

2-port CAN interface universal PCI boards with 2 kV isolation



Features and Benefits

- Supports CAN 2.0A and CAN 2.0B
- Two independent CAN communication ports
- CAN transfer rate up to 1 Mbps
- 2 kV electrical isolation
- LED for transmit/receive status on each port
- Optional 120-ohm terminal resistor for CAN bus network
- DLL library and examples included
- Windows driver provided

Certifications



Introduction

Moxa's CP-602U-I CAN (Controller Area Network) interface board supports the Universal PCI interface. As a standalone CAN controller, the CP-602U-I is a cost-effective solution that provides two active CAN controllers with a DB9 connector on the same board. The CP-602U-I CAN interface board uses the NXP SJA1000 and transceiver PCA82C251, which provide bus arbitration and error detection. The -40 to 85°C wide operating temperature (CP-602U-I-T only) and 2 kV isolation make the boards suitable for use in harsh industrial environments.

Specifications

CAN Interface

Baudrate	10/20/50/125/250/500/800/1000 kbps, user-defined
Connector	DB9 male
No. of Ports	2

Environmental Limits

Operating Temperature	CP-602U-I w/o Cable: 0 to 55°C (32 to 131°F) CP-602U-I-T w/o Cable: -40 to 85°C (-40 to 185°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class B
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 2 kV IEC 61000-4-6 CS: 150 kHz to 80 MHz: 3 V/m; Signal: 3 V/m IEC 61000-4-8 PFMF IEC 61000-4-11

Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

MTBF

Time	1,989,990 hrs
------	---------------

Standards	Telcordia SR332
-----------	-----------------

Warranty

Warranty Period	5 years
-----------------	---------

Details	See www.moxa.com/warranty
---------	--


Package Contents

Device	1 x CP-602U-I Series serial board
--------	-----------------------------------

Documentation	1 x quick installation guide 1 x substance disclosure table 1 x warranty card
---------------	---

Dimensions

Unit: mm (inch)

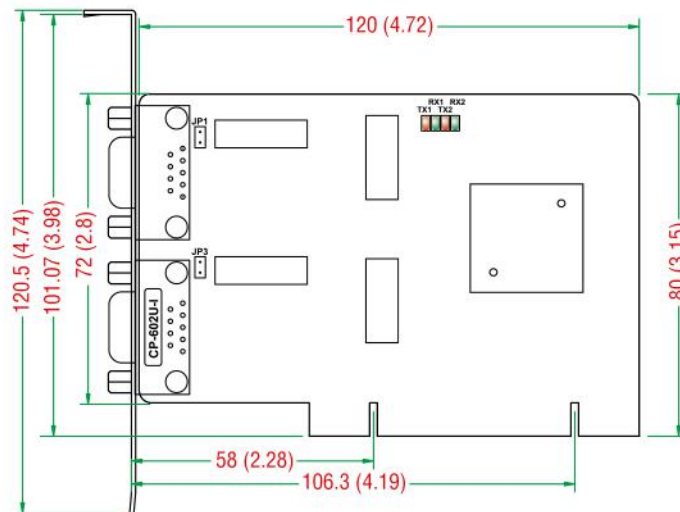

Ordering Information

Model Name	Serial Bus	CAN Specification	No. of Serial Ports	Serial Isolation Protection	Operating Temp.
CP-602U-I w/o Cable	Universal PCI	CAN 2.0 A/B	2	2 kV	0 to 55°C
CP-602U-I-T w/o Cable	Universal PCI	CAN 2.0 A/B	2	2 kV	-40 to 85°C

Accessories (sold separately)

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
-----------------	--

Cables

CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm

