

OnCell G3110/G3150

Advanced quad-band GSM/GPRS/EDGE IP gateways



- > Universal quad-band GSM/GPRS/EDGE-850/900/1800/1900-MHz
- > Connect to Ethernet and serial devices over an integrated VPN
- > Redundant DC power input
- > 2 digital inputs and 1 relay output
- > Centralize private IP management software with OnCell Central Manager
- > DIN-rail mounting
- > GuaranLink for reliable, consistent connectivity



Overview

The OnCell G3110 and G3150 industrial RS-232 and RS-232/422/485 GSM/GPRS/EDGE IP gateways are designed to transmit data transparently over GSM/GPRS/EDGE cellular networks. The OnCell G3110 and G3150 can transmit data from both serial devices and Ethernet devices to a WAN interface, and come with private IP management software and VPN support for handling the IP address issue in cellular network structures. The products also come with a

built-in relay output that can be configured to indicate the priority of events when notifying or warning engineers in the field. Two digital inputs also allow you to connect basic I/O devices, and the OnCell's redundant power inputs assure non-stop operation. The OnCell G3110/G3150 series also offers wide temperature models which can withstand extreme temperature conditions.

Specifications

Cellular Interface

Standards: GSM/GPRS/EDGE

Band Options: Quad-band 850/900 and 1800/1900 MHz

EDGE Multi-slot Class: Class 12

EDGE Data Rate: 237 Kbps DL, 237 Kbps UL

EDGE Terminal Device Class: Class B

GPRS Multi-slot Class: Class 12

GPRS Data Rate: 85.6 Kbps DL, 43 Kbps UL

GPRS Terminal Device Class: Class B

GPRS Coding Schemes: CS1 to CS4

Tx Power:

GSM1800/1900: 1 W

EGSM850/900: 2 W

LAN Interface

Number of Ports: 1

Ethernet: 10/100 Mbps, RJ45 connector, Auto MDI/MDIX

SIM Interface

Number of SIMs: 1

SIM Control: 3 V

Serial Interface

Number of Ports: 1

Serial Standards:

OnCell G3110: RS-232 (DB9 male connector)

OnCell G3150: RS-232 (DB9 male connector), RS-422/485 (5-pin terminal block connector)

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2 (when parity = None)

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

Baudrate: 50 bps to 921.6 kbps

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

RS-422: Tx+, Tx-, Rx+, Rx-, GND

RS-485-4w: Tx+, Tx-, Rx+, Rx-, GND

RS-485-2w: Data+, Data-, GND

I/O Interface

Alarm Contact: 1 relay output with current carrying capacity of 1 A @ 24 VDC

Digital Inputs: 2 electrically isolated inputs

• +13 to +30 V for state "1" (On)

• +3 to -30 V for state "0" (Off)

Software

Network Protocols: ARP, AT Commands (Virtual Modem), DDNS, DHCP/BOOTP, DNS Relay, HTTP, HTTPS, ICMP, IPsec, SMTP, SNMP, SSH, SSL, TCP/IP, Telnet, UDP

Router/Firewall: NAT, port forwarding, WAN IP filtering

Authentication: Local user-name and password

Cellular Connectivity: GuaranLink

Serial Security: Accessible IP list

Serial Operation Modes: RReal COM, Reverse Real COM, TCP Server, TCP Client, UDP, SMS Tunnel, RFC2217, Secure Real COM, Secure Reverse Real COM, Secure TCP Server, Secure TCP Client, Virtual Modem, Ethernet Modem

Windows XP/2003/Vista/Server 2008 x64 Edition

Windows Real COM Drivers: Windows 2000/XP/2003/Vista/Server 2008, Windows XP/2003/Vista/Server 2008 x64 Edition

Fixed TTY Drivers: SCO Unix, SCO OpenServer 5, SCO OpenServer 6, UnixWare 7, SVR4.2, QNX 4.25, QNX 6, Solaris 10, FreeBSD 5, FreeBSD 6

Linux Real TTY Drivers: Linux kernels 2.2.x, 2.4.x, 2.6.x

Management Software

Utilities: OnCell Search Utility
Configuration and Management Options: SNMP v1/v2c/v3, Web/Telnet/Serial Console, SSH, Remote SMS Control, Auto IP Report
Private IP Solution: OnCell Central Manager

Physical Characteristics

Housing: Aluminum, providing IP30 protection
Weight: 440±5 g
Dimensions: 125.5 x 28.0 x 92.5 mm (4.94 x 1.10 x 3.64 in)

Environmental Limits

Operating Temperature:
 Standard Temperature: -30 to 55°C (-22 to 131°F)
 Wide Temperature: -30 to 70°C (-22 to 158°F)
Storage Temperature: -40 to 75°C (-40 to 167°F)
Ambient Relative Humidity: 5 to 95% (30°C, non-condensing)

Power Requirements

Input Voltage: 12 to 48 VDC
Power Consumption: 12 to 48 VDC, 400 mA (idle), 900 mA (max.)

Standards and Certifications

Safety: UL 60950-1
EMC: FCC Part 15 Subpart B Class A, EN 55022 Class A, EN 55024
Radio: FCC Part 22H, FCC Part 24E, EN 301 489-1, EN 301 489-7, EN 301 511, PTCRB (OnCell G3150 only)

Reliability


MTBF (mean time between failures): 339,000 hrs

Warranty


Warranty Period: 5 years
Details: See www.moxa.com/warranty

Dimensions & Pin Assignment

Unit: mm (inch)

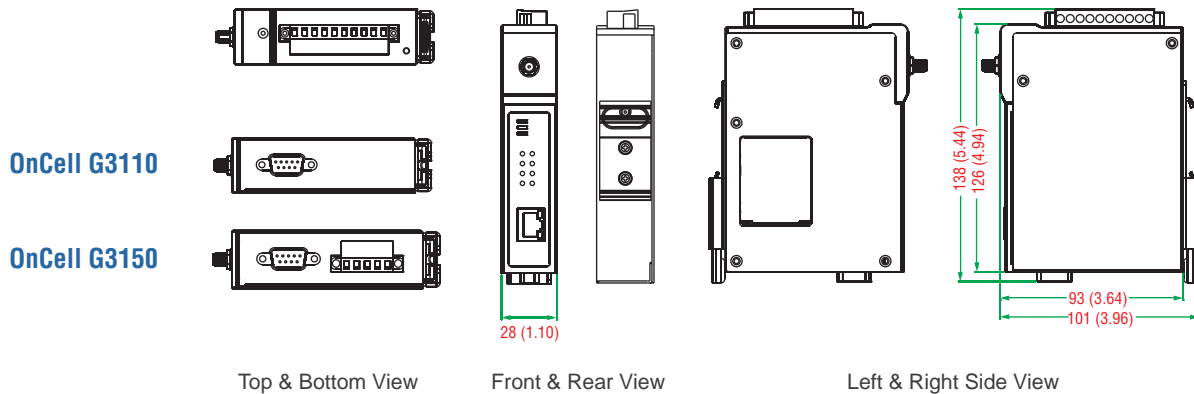

DB9 male connector



PIN	RS-232	RS-422/485-4w	RS-485-2w
1	DCD	TxD-(A)	-
2	RxD	TxD+(B)	-
3	TxD	RxD+(B)	Data+(B)
4	DTR	RxD-(A)	Data-(A)
5	GND	GND	GND
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-
9	-	-	-

Ordering Information

Available Models

OnCell G3110: 1-port Quad-band industrial GSM/GPRS/EDGE IP-Gateway, RS-232, DB9 male, 12-48 VDC
OnCell G3150: 1-port Quad-band industrial GSM/GPRS/EDGE IP-Gateway, RS-232/422/485, DB9 male, 12-48 VDC
OnCell G3110-T: 1 port Quad-band industrial GSM/GPRS/EDGE IP-gateway, RS-232, DB9 male, 12-48 VDC, -30 to 70°C
OnCell G3150-T: 1 port Quad-band industrial GSM/GPRS/EDGE IP-gateway, RS232/422/485, DB9 male, 12-48 VDC, -30-70°C

Note: Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

Package Checklist

- OnCell IP gateway
- Rubber SMA antenna
- DIN-rail kit
- Documentation and software CD
- Quick installation guide
- Warranty card

Note: An activated SIM card (not included) must be provided by a third party Cellular Service Provider