


# NISK300LAN Kit

Mini-PCIe 2x Gigabit LAN Card with  
universal I/O bracket

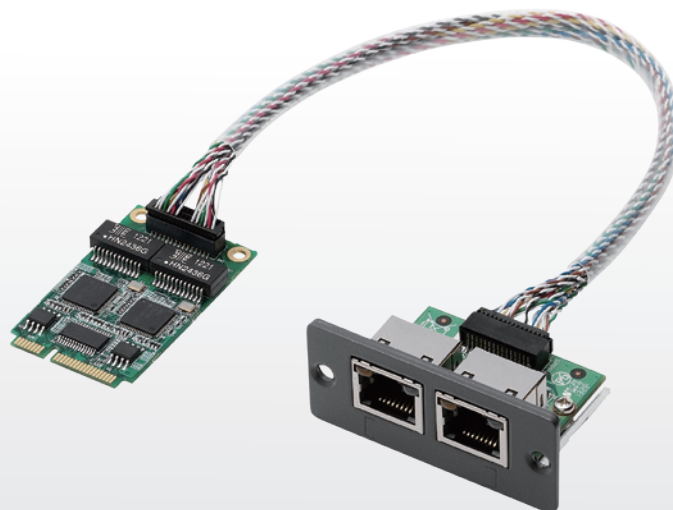

## Main Features

- Mini-PCIe Form Factor
- Easy and User-Friendly Configurations
- Dual RJ45 Ethernet Interface

## Product Overview

NISK300LAN Kit with universal I/O bracket is specifically designed with NISE300 and NISE 4000/NIFE 4000 models for network connectivity expansions. It provides dual Intel® Gigabit Ethernet ports with latest I210IT controllers, which gives great network connectivity and less power consumption compared to the previous generation Intel® 82574L controllers. The dual LAN ports on NISK300LAN Kit supports WoL, PXE and teaming functions for managing network activities.

## Specifications

### Form Factor

- Mini-PCIe Form Factor

### Chipset

- Intel® LAN Controller I210 Family (I210-IT)
- Compliant with IEEE802.3, 802.3u, and 802.ab

### Transfer Rate

- Support 10/100/1000 Mbps transfer rates

### Functions

- Support WoL, PXE and Teaming Functions

### Dimensions

- Dimensions 30mm (W) x 51mm (L)

### LAN LED Definitions

LAN Speed	Activity LED	Link type LED
10/100 Mbps	Orange (Left, Flashing)	Orange (Right, permanent)
1000 Mbps (Gigabit)	Orange(Left, Flashing)	Green (Right, permanent)

### Environment

- Environment Operating Temperature: 0°C to 70°C
- Storage Temperature: -20°C to 75°C

### OS Support

- Windows 7 32bits and 64bits
- Windows 8 32bits and 64bits

## Ordering Information

### Barebone

- **NISK300LAN Kit with universal I/O bracket, Cable Length 25CM (P/N: 10JK0030000X0)**

[www.nexcom.com](http://www.nexcom.com)

