

# UPort 1400-G2 Series

## 4-port RS-232/422/485 USB-to-serial converters



### Features and Benefits

- USB 3.2 SuperSpeed capability
- 512-byte on-chip FIFO cache and flow control for enhanced performance
- Drivers provided for a broad selection of operating systems, including Windows and Linux
- 50 bps to 921.6 kbps baudrate (nonstandard baudrates supported)
- Double-sided LEDs located at the corners show power, TX, and RX statuses in either directions
- Latching USB cable design for firmer connection
- Wide operating temperature models available for -40 to 75°C (-40 to 167°F) environments
- Serial port with 2 kV isolation protection (for “-I” models)

### Certifications



## Introduction

The UPort® 1400-G2 Series USB-to-serial converters are ideal for laptop or workstation computers that need serial port expansion. They are essential for computers which need to connect different serial devices in the field or need separate interface converters for devices without a standard COM port or DB9 connector. The computers also come with a USB cable that has a latch and screw lock for a more secure connection between the UPort and your computer. The UPort® 1400-G2 Series converts from USB to RS-232/422/485. All products are compatible with legacy serial devices and can be used with instrumentation and point-of-sale applications.

## Specifications

### USB Interface

USB Standards	USB 3.2 Gen 1 USB 1.1/2.0 compliant
Speed	5 Gbps, 480 Mbps, 12 Mbps
No. of USB Ports	1
USB Connector	USB Type B

### Serial Interface

Connector	DB9 male
No. of Ports	4
Serial Standards	RS-232: UPort 1410-G2 RS-232/422/485: All other models
FIFO	512 bytes
Baudrate	50 bps to 921.6 kbps (supports non-standard baudrates)
Parity	None, Even, Odd, Space, Mark
Data Bits	5, 6, 7, 8

Stop Bits	1, 1.5, 2
Flow Control	RTS/CTS, XON/XOFF
RS-485 Data Direction Control	Automatic Data Direction Control (ADDC)
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	120 ohms
Surge	0.5 kV
Isolation	2 kV (I models)

#### Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND

#### Serial Software Features

Windows Drivers	Windows 11, 10, 8.1, 8 and 7 Windows Server 2022, 2019, 2016, 2012 R2, 2012 and 2008 R2
Linux Drivers	Kernel 6.x, 5.x and 4.x
Mac Drivers	macOS version (Intel 64): 13, 12, 11 and 10.1x
Virtual Machine	VMware Fusion (Windows on macOS 13, 12, 11, 10.1x, Intel 64) VMWare ESXi (Linux kernel 4) Parallels Desktop (Windows on macOS 13, 12, 11, 10.1x, Intel 64)
Arm®-based Platform Support	Linux kernel 6.x, 5.x and 4.x
Android API	Android 3.1.x and later

#### Power Parameters

Input Voltage	5 VDC by USB bus power or 12 to 48 VDC by external power adaptor
Input Current	UPort 1410-G2: 183 mA @ USB 2.0, 370 mA @ USB 3.2, 200 mA @ 12 VDC UPort 1450-G2 models: 266 mA @ USB 2.0, 452 mA @ USB 3.2, 240 mA @ 12 VDC UPort 1450I-G2 models: 445 mA @ USB 2.0, 633 mA @ USB 3.2, 340 mA @ 12 VDC

#### Physical Characteristics

Housing	Metal
Dimensions	185 x 30 x 90.6 mm (7.28 x 1.18 x 3.57 in)
Weight	UPort 1410-G2: 359 g (0.79 lb) UPort 1450-G2 models: 373 g (0.82 lb) UPort 1450I-G2 models: 379 g (0.84 lb)
IP Rating	IP20

#### Environmental Limits

Operating Temperature	Standard models: 0 to 60°C (32 to 140°F) -T models: -40 to 75°C (-40 to 167°F)
Storage Temperature	-40 to 75°C (-40 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

## Standards and Certifications

EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV IEC 61000-4-5 Surge: Power: 1 kV, Signal: 0.5 kV IEC 61000-4-6 CS: 3 V; 150 kHz to 80 MHz IEC 61000-4-8 PFMF
Safety	IEC 62368-1 EN 62368-1 UL 62368-1 (CB) KC
Shock	IEC 60068-2-27
Vibration	IEC 60068-2-6 IEC 60068-2-64
Freefall	IEC 60068-2-31

## Declaration

Green Product	RoHS, CRoHS, WEEE
---------------	-------------------

## MTBF

Standards	Telcordia Standard SR332, Telcordia Issue 2
Time	UPort 1410-G2: 1,846,458 hrs UPort 1450-G2 models: 1,431,860 hrs UPort 1450I-G2 models: 1,140,587 hrs

## Package Contents


Device	1 x UPort 1400-G2
Cable	1 x USB 3.2 Gen 1 cable with latch and screw
Installation Kit	4 x rubber stand
Documentation	1 x quick installation guide 1 x warranty card

## Warranty

Warranty Period	5 years Note: Product only
Details	See <a href="http://www.moxa.com/warranty">www.moxa.com/warranty</a>

## Dimensions

Unit: mm (inch)

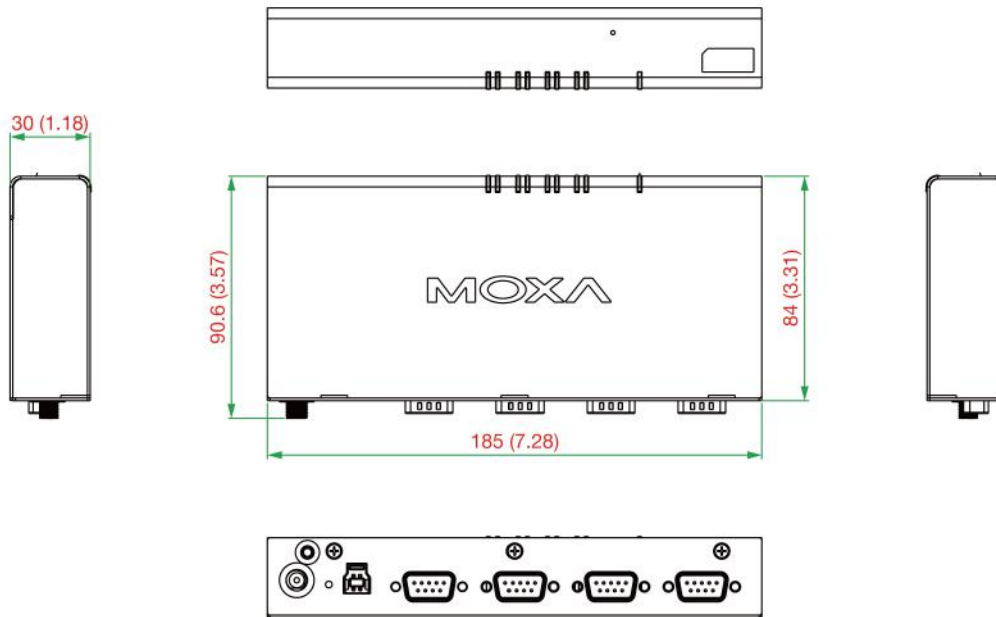

## Ordering Information

Model Name	Serial Standards	No. of Serial Ports	Isolation	Power Input	Operating Temp.
UPort 1410-G2	RS-232	4	-	USB bus power/ Power adapter	0 to 60°C
UPort 1450-G2	RS-232/422/485	4	-	USB bus power/ Power adapter	0 to 60°C
UPort 1450-G2-T	RS-232/422/485	4	-	USB bus power/ Power adapter	-40 to 75°C
UPort 1450I-G2	RS-232/422/485	4	2 kV	USB bus power/ Power adapter	0 to 60°C
UPort 1450I-G2-T	RS-232/422/485	4	2 kV	USB bus power/ Power adapter	-40 to 75°C

## Accessories

### Cables

CBL-USB3-BA-G-120	USB 3.2 Gen 1 cable, type A-to-type B with latch and screw, 1.2 m
CBL-USB3-BA-G-028	USB 3.2 Gen 1 cable, type A-to-type B with latch and screw, 0.28 m
CBL-USB3-BA-BK-120	USB 3.2 Gen 1 cable, type A-to-type B, 1.2 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm
CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m

### Connectors

LB-DB9F-G-01	Serial loopback DB9 adaptor
Mini DB9F-to-TB	DB9 female to terminal block connector
ADP-RJ458P-DB9F	DB9 female to RJ45 connector

### DIN-Rail Mounting Kits

DK-UP1400-G2	DIN Rail mounting kits for UPort 1400-G2
--------------	--

### Wall-Mounting Kits

WK-UP400A-BOT-BK	Bottom-panel wall-mounting kit for the UPort 400A/1400-G2/1600-G2 Series with 2 plates (43 x 30 x 2 mm or 1.69 x 1.18 x 0.08 in), 6 M3 x 5 mm screws
------------------	--

## Rack-Mounting Kits

RK-UP1600-G2	Rack mounting kits for UPort 1400/1600-G2
--------------	---

## Power Adapters

PWR-12050-EU-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, EU plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2 UPort 1450-G2 UPort 1450I-G2
PWR-12050-CN-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, CN plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2 UPort 1450-G2 UPort 1450I-G2
PWR-12050-USJP-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, US/JP plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2 UPort 1450-G2 UPort 1450I-G2
PWR-12050-UK-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, UK plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2 UPort 1450-G2 UPort 1450I-G2
PWR-12050-AU-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, AU plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2 UPort 1450-G2 UPort 1450I-G2
PWR-12050-KR-S1	Locking barrel plug, 12 VDC, 0.5 A, 100 to 240 VAC, KR plug, 0 to 40°C operating temperature  Applicable Models: UPort 1410-G2/KC UPort 1450-G2/KC UPort 1450I-G2/KC
PWR-12150-EU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, EU plug, -40 to 75°C operating temperature  Applicable Models: UPort 1450-G2-T UPort 1450I-G2-T
PWR-12150-USJP-SA-T	Locking barrel plug, 12 VDC 1.5 A, 100 to 240 VAC, US/JP plug, -40 to 75°C operating temperature  Applicable Models: UPort 1450-G2-T UPort 1450I-G2-T
PWR-12150-CN-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, CN plug, -40 to 75°C operating temperature  Applicable Models: UPort 1450-G2-T UPort 1450I-G2-T
PWR-12150-AU-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, AU plug, -40 to 75°C operating temperature  Applicable Models: UPort 1450-G2-T UPort 1450I-G2-T
PWR-12150-UK-SA-T	Locking barrel plug, 12 VDC, 1.5 A, 100 to 240 VAC, UK plug, -40 to 75°C operating temperature  Applicable Models: UPort 1450-G2-T UPort 1450I-G2-T

© Moxa Inc. All rights reserved. Updated Mar 07, 2024.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.